




# Bus Bar Contact

## Assembly Instructions PP75

### Bus Bar Contact Assembly Instructions

1. Insert the contact into the D-shaped mounting hole in the bus bar.
2. Tighten the lock nut provided until the contact is locked securely in place (approximately 18 in-lbs). **Do not grip nose of contact while tightening.**
3. Slide the connector housing over the contacts until the noses of both contacts snap firmly over the springs in the housing.
4. The bus bar connector is now secure and ready for use.

Panel Layout	-J*-	-K*-	-L-	-M-
inches	.63	.63	.265	.115
mm	16.0	16.0	6.73	2.92

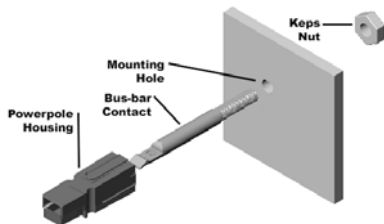

### WARNING

\* Assumes interlocked dovetails

UTMOST CAUTION SHOULD BE USED WHEN WORKING ON LIVE CONNECTOR CONTACTS

### TRADEMARKS

"SB" and "Anderson Power Products" are registered U.S. and foreign trademarks of Anderson Power Products.



**HEADQUARTERS:** 13 Pratts Junction Road, P.O. Box 579, Sterling, MA 01564 T:978-422-3600 F:978-422-3700

**EUROPE:** Rathealy Road, Fermoy Co. Cork, Ireland T:353-(0)25-32277 F:353-(0)25-32296

**ASIA/PACIFIC:** IDEAL Anderson Asia Pacific Ltd., Unit 922-928 Topsail Plaza, 11 On Sum Street, Shatin N.T., Hong Kong T:852-2636-0836 F:852-2635-9036

[www.andersonpower.com](http://www.andersonpower.com)